If we select this option, we need only open holes in the tank and pass flexible steel hose with cable. We need to decide how long will be cable hose, because this I need to order and give precise specification.
In the tank we can have only holes, if acceptable

Red extensio
to the gener

R

To the generator

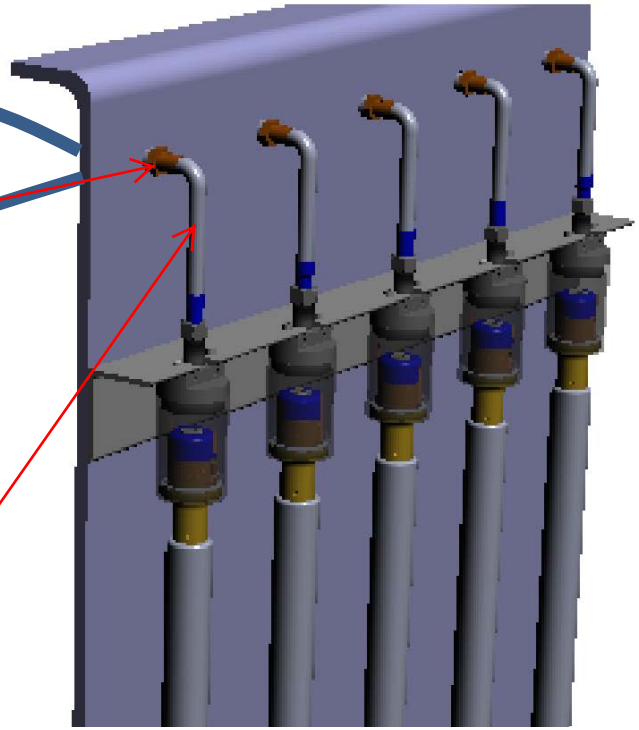

If we select this situation, we will need to order short flexible cable hose, or to make rigid tubes from ultrasonic converter to the tank wall